


Specification:

- 1. Electrical Characteristics
 - 1.1 Contact Resistance: 20mΩ Max.Initial.
 - 1.2 Dielectric Withstanding Voltage: 500V AC(rms) for 1 Minute.
 - 1.3 Insulation Resistance: 1000Ω Min.
- 2. Mechanical Characteristic:
 - 2.1 Durability: 300 cycles
- 3. Environment Characteristics:
 - 3.1. Operating Temperature: 0°C~+85°C.
 - 3.2. Storage Temperature: -20°C~+ 70°C.
- 4. Application Wire Awg: #20-24.

Position	A±0.2	B±0.2	C±0.2	
			Male	Female
9P	30.80	24.99	17.90	16.33
15P	39.14	33.32	26.50	24.66
25P	53.04	47.04	40.00	38.38
37P	69.32	63.50	56.50	54.84

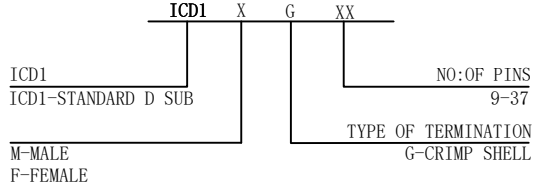

Interface INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Description	D-Sub Male Standard Crimp Type				
Part no.	ICD1-MGXX	Version	A0	Proportion	
Customer Code	TBA	Customer Part No.	TBA	Unit	mm
Tolerance	X. ±0.50, X. ± 0.38, XX ± 0.25, XXX ± 0.13			File No.	TBA
Drawn By	SM	Checked by	RKS	Approved by	YRS
				Date	12/22/2022

