


Specifications:

Current Rating: 3amp AC.5amp DC
 Insulation Resistance (Min.): 500MΩ
 Withstanding Voltage (Min): 500V AC
 Contact Resistance (Max.): 30MΩ max at DC 100 mA
 Operation Temperature: -55 °C to +105 °C
 Contact: Brass, t=0.20MM
 Insulation: PBT+30%Glass Fiber UL94V-0
 Shell: Steel, t=0.4mm

Position	A	B	C	D	E
9	16.92	24.99	30.83	19.28	15.65
5	25.25	33.32	39.25	27.65	24.40
25	38.96	47.04	53.05	41.30	38.00
37	55.42	63.50	69.45	57.40	54.50

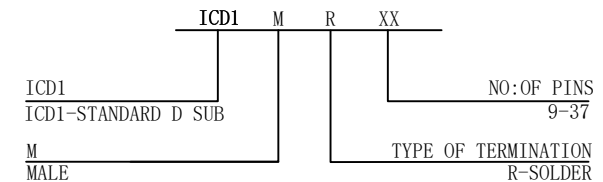

Interface® INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	Interface® D-Sub 2.54mm Wire Solder Type Male						
Part no.	ICD1-MRXX	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	02/05/2023