


**Specifications:**

Current Rating: 3amp AC.5amp DC  
 Insulation Resistance (Min.): 500MΩ  
 Withstanding Voltage (Min): 500V AC  
 Contact Resistance (Max.): 30MΩ max at DC 100 mA  
 Operation Temperature: -55 °C to +105 °C  
 Contact: Brass, t=0.20MM  
 Insulation: PBT+30%Glass Fiber UL94V-0  
 Shell: Steel, t=0.4mm

Position	A	B	C	D	E
9	16.92	25.00	30.80	19.20	15.55
15	25.25	33.30	39.20	27.70	24.70
25	38.96	47.04	53.05	41.10	38.10
37	55.42	63.50	69.40	57.30	54.35

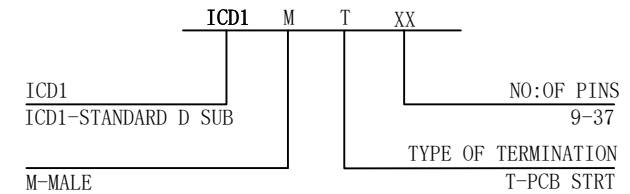

<b>Interface</b> INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	Interface® D-Sub Male PCB Solder Type Straight						
Part no.	ICD1-MTXX	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	02/05/2023