


Specification:
 Insulation Resistance(MIN): 500MOHMS
 Current Rating(MIN): 3amp AC, 5amp DC
 Withstanding Voltage(MIN): 500VAC
 Contact Resistance(Max): 30 mohms
 Contact Material: Brass,t=0.20MM
 Insulation: PBT+30%Glass Fiber UL94v-0
 Shell :Steel, t=0.4MM

No. Pos	A±0.30	B±0.13	C±0.20	D±0.10	E±0.10
15Pin	16.35	25.00	30.80	19.20	2.29
26Pin	24.70	33.30	39.20	27.70	2.29
44Pin	38.40	47.04	53.05	41.10	2.29
62Pin	54.80	63.50	69.40	57.30	2.41

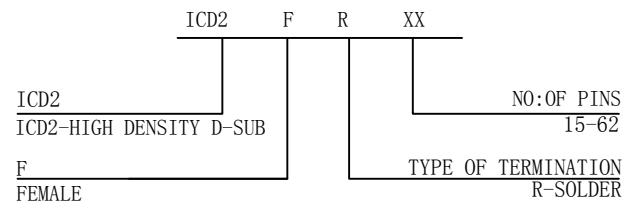

Interface INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	D-Sub Female HD Wire Solder Type (High Density)						
Part no.	ICD2-FRXX	Version	A0	Proportion			
Customer Code	NA	Customer Part No.	NA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.			
Drawn By	SM	Checked by	RKS	Approved by	YRS	Date	12/22/2022