


Specification:

Electrical:
 Contact Current Rating: 5 A
 Dielectric Withstanding Voltage: AC 500 V
 Mechanical:
 Insulation Resistance:1000MEGΩ
 Operating Voltage:500V
 Operating Temperature:-55°C to +105°C
 Material:
 Housing:LCP Fiber UL 94V-0 Rated
 Insulator Color:Back
 Contact: Phospher Bronze or Tin Plated

| NO.POS | A±0.30 | B±0.13 | C±0.20 | D±0.10 |
|--------|--------|--------|--------|--------|
| 15PIN | 30.80 | 24.99 | 16.33 | 2.29 |
| 26PIN | 39.20 | 33.32 | 24.66 | 2.29 |
| 44PIN | 53.10 | 47.04 | 38.35 | 2.29 |
| 62PIN | 69.40 | 63.50 | 54.80 | 2.41 |
| 78PIN | 67.10 | 61.20 | 52.75 | 2.41 |

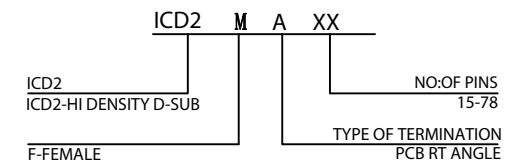

Interface INTERFACE CONNECTRONICS PVT LTD
 Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

| | | | | | | | |
|---------------------|---|-------------------|-----|-------------|-----|------|------------|
| Product Description | D Sub High Density Male Right Angle PCB Solder Type | | | | | | |
| Part no. | ICD2-MAXX | Version | A0 | Proportion | | | |
| Customer Code | | Customer Part No. | | Unit | mm | | |
| Tolerance | X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13 | | | File No. | | | |
| Drawn By | SM | Checked by | RKS | Approved by | YRS | Date | 12/02/2022 |