
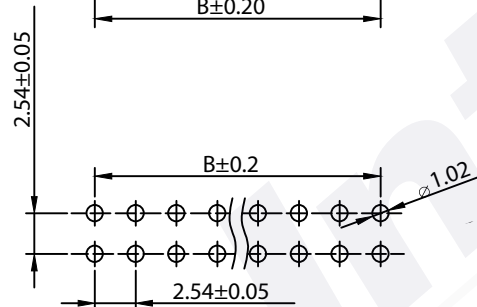
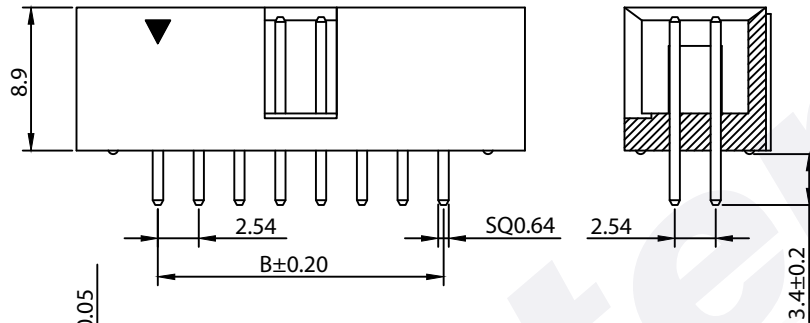


Specification:

Current Rating: 3A
 Insulation Resistance (Min.): 1000M Ω
 Voltage Rating: 250V AC/DC
 Contact Resistance (Max.): 20m Ω
 Operation Temperature: -25 °C to +85 °C
 Contact Material: Brass
 Contact Plating: Nickel Plated Bottom 50μ and Gold Plated 0.8μ
 Insulation Material: PBT (Black) (UL94V-0)

PART NO	A	B	C
ICF2-10S	20.32	10.16	18.16
ICF2-14S	25.40	15.24	23.24
ICF2-16S	27.94	17.78	25.78
ICF2-20S	33.02	22.86	30.86
ICF2-26S	40.64	30.48	38.48
ICF2-30S	45.72	35.56	43.56
ICF2-34S	50.80	40.64	48.64
ICF2-40S	58.42	48.26	56.26
ICF2-50S	71.12	60.96	69.10
ICF2-60S	83.82	73.66	81.67
ICF2-64S	88.90	78.74	86.75

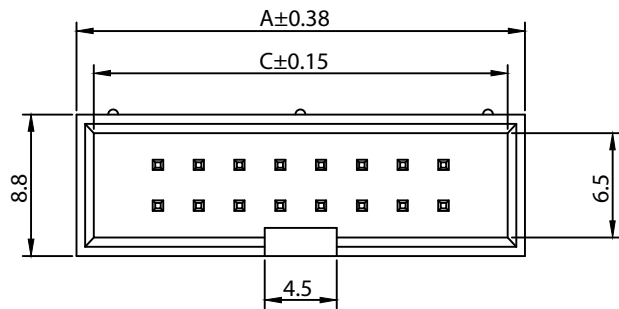

Interface INTERFACE CONNECTRONICS PVT LTD
 Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Specification	2.54mm Box Header Straight				
Part no.	ICF2-XXS	Version	A0	Proportion	
Customer Code	TBA	Customer Part No.	TBA	Unit	mm
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA
Drawn By	SM	Checked by	RKS	Approved by	YRS
				Date	12/3/2019