

PIN CONFIGURATION		
SIDE A	COLOUR	SIDE B
PIN#1	RED	PIN#1
PIN#2	WHITE	PIN#2
PIN#3	GREEN	PIN#3
PIN#4	BLACK	PIN#4
SHELL	SHIELD	SHELL

FINISHED GOOD(CA) PART NO: DESCRIPTION

RCA-907X XX 01

TYPE OF CA LENGTH OF CA


RCA-9073: USB 2.0 A MALE TO B MALE CABLE ASSEMBLY WITH 26AWG/1P+24AWG/2C CABLE

RCA-9075: USB 2.0 A MALE TO B MALE CABLE ASSEMBLY WITH 28AWG/1P+24AWG/2C CABLE


RCA-9077: USB 2.0 A MALE TO B MALE CABLE ASSEMBLY WITH 28AWG/1P+28AWG/2C CABLE

COLOR OF CA
BLACK

0.1 TO XX MTRS

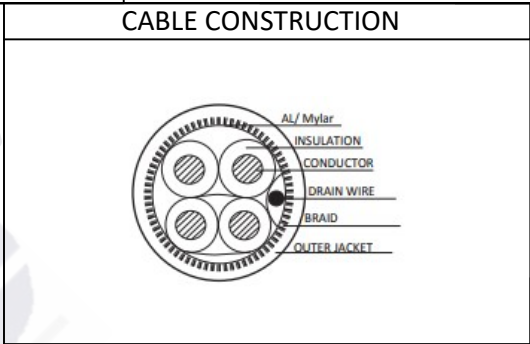

FOR EXAMPLE;
PART NO: RCA-9075-2-01
DISC: USB 2.0 A MALE TO B MALE CABLE WITH 28AWG/1PR+24AWG/2C USB CABLE
LENGTH: 2MTR

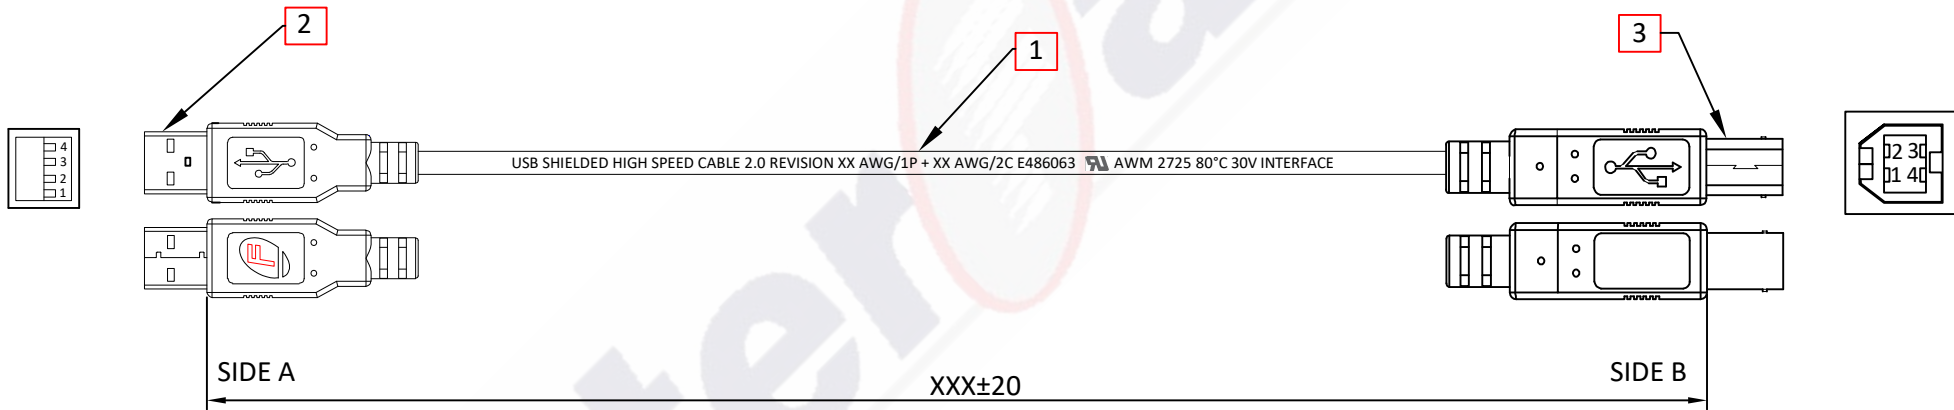

SL NO	DESCRIPTION	QTY
1	USB SHIELDED HIGH SPEED CABLE 2.0 REVISION XX AWG/1P + XX AWG/2C E486063 AWM 2725 80°C 30V INTERFACE	1NOS
2	USB A MALE, SOLDER TYPE CONNECTOR	1NOS
3	USB B MALE, SOLDER TYPE CONNECTOR	1NOS

<p>INTERFACE CONNECTRONICS PVT LTD</p>		Description		USB 2.0 A MALE TO B MALE CABLE	
		Drg No		A4-01-907X-XXX-01	
		ICPL Part NO:		RCA-907X-XX-01	
Address: B-260,Peenya 2nd stage,Peenya industrial area, Bangalore-560058.		Customer Part No	TBA	Rev	00
Drafted by	MC	Angle of projections	Third angle	Scale	1:1
Checked	RV	Date:	21-12-2023	Sheet	1 of 1
Approved	NC	All dimensions are in mm		Size:	A4
Tolerance :	<small>Unless otherwise specified for length</small> 0 - 500 - ±5 1000 - 1500 - ±15 500 - 1000 - ±10 1500 - 2000 - ±20				