

Specification:

Housing Material: Polycarbonate. UL Flammability Rating: UL 94V-2, RoHS Compliant.





Contacts Type: Two prong angled pin fits solid/stranded wires.

Gold Plating: Fu" (flash)


Shielded Material: Non-Shielded

Operating Temperature: -10°C to +60°C

Housing Colour: Transparent

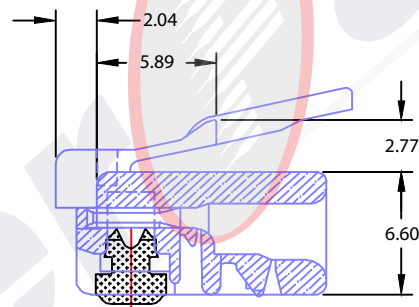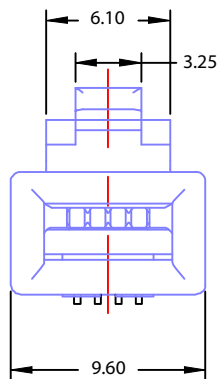

□ Two prongs pin



| | | | | | | | |
|---|---|-------------------|-----|-------------|-----|------|-----------|
| Interface INTERFACE CONNECTRONICS PVT LTD | | | | | | | |
| Address: #85, Unit #3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022. | | | | | | | |
| Product Description | RJ11 6P4C Plug, UL E500793 | | | | | | |
| Part no. | ICMP-64-00 | Version | A0 | Proportion | | | |
| Customer Code | TBA | Customer Part No. | TBA | Unit | mm | | |
| Tolerance | X. ±0.50, X. ±0.38, .XX ±0.25, .XXX ±0.13 | | | File No. | TBA | | |
| Drawn By | SM | Checked by | RKS | Approved by | YRS | Date | 12/3/2019 |