


Recommended panel cutout bezel opening below top of PCB

Specification:

Electrical
 Voltage Rating: 125V AC RMS
 Current Rating: 1.5 Amps Max.
 Contact Resistance: 20MΩ Max.
 Insulation Resistance: 500MΩ Min. @500V DC
 Dielectric Strength: 1000V AC @0.5mA 50 Hz/60 Hz 1 Minute

Mechanical
 Housing Material: Nylon46 , UL94V-0, Black Colour
 Contact Material: Phosphor Bronze Ø0.46mm
 Shielding Material: CuZn (C2860)
 Plating: Gold Plating over Nickel, Gold Flash
 Operating Life: 750 Cycle Min.
 Mating/ Unmating Force: 30N Max.
 Retention Strength: 50N for 60S±5S

Environmental
 Storage: -40 °C to +70 °C
 Operation: -40 °C to +70 °C
 Wave Soldering Temperature: 260±5 °C

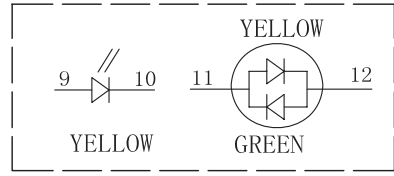

Interace INTERFACE CONNECTRONICS PVT LTD <small>Connectors to Connectivity™</small> Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	RJ45 8P8C Shielded with Single LED and Fins Modular Jack Right Angle						
Part no.	ICMS-856	Version	A0	Proportion			
Customer Code		Customer Part No.		Unit	mm		
Tolerance	X. ±0.50, X. ±0.38, XX ±0.25, .XXX ±0.13			File No.			
Drawn By	SM	Checked by	RKS	Approved by	YRS	Date	12/3/2019