

PIN CONFIGURATION		
SIDE A	COLOUR	SIDE B
P#1	RED	C#1
P#2	BLACK	C#2
P#3	YELLOW/GREEN	C#3

FINISHED GOOD(CA) PART NO: DESCRIPTION

RCA-9081 XX 01


TYPE OF CA: RCA-9081: POWER CORD 3PIN PLUG TO C13, WITH 0.75SQ.MM CABLE, RATING: 6A 250V, ISI MARKED(IS 1293)

COLOR OF CA: BLACK





LENGTH OF CA: 0.1 TO XX MTRS

FOR EXAMPLE;
 PART NO: RCA-9081-1-01
 DISC: POWER CORD 3PIN PLUG TO C13
 LENGTH: 1MTR WITH 0.75SQ.MM CABLE
 RATING: 6A 250V

CABLE CONSTRUCTION



PARAMETERS	
No. of Strands:	24
Conductor Diameter (max):	0.210mm
Conductor Resistance (max):	26.00Ω/Km
Core Colour:	Red, Black and Yellow/Green
Insulation Material:	PVC
Insulation OD (max):	2.80mm
Overall Diameter (max):	7.70mm
Outer Sheath Material:	PVC
Insulation Resistance (min):	2.67MΩ-Km @ 27°C
High Voltage Test (5 Minutes):	Withstand 3KV AC @ Room Temperature

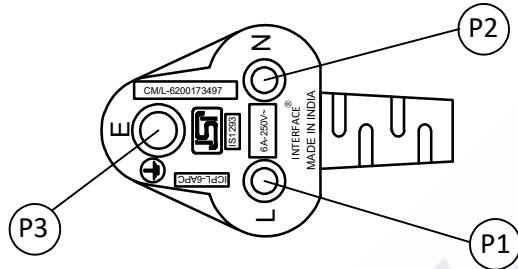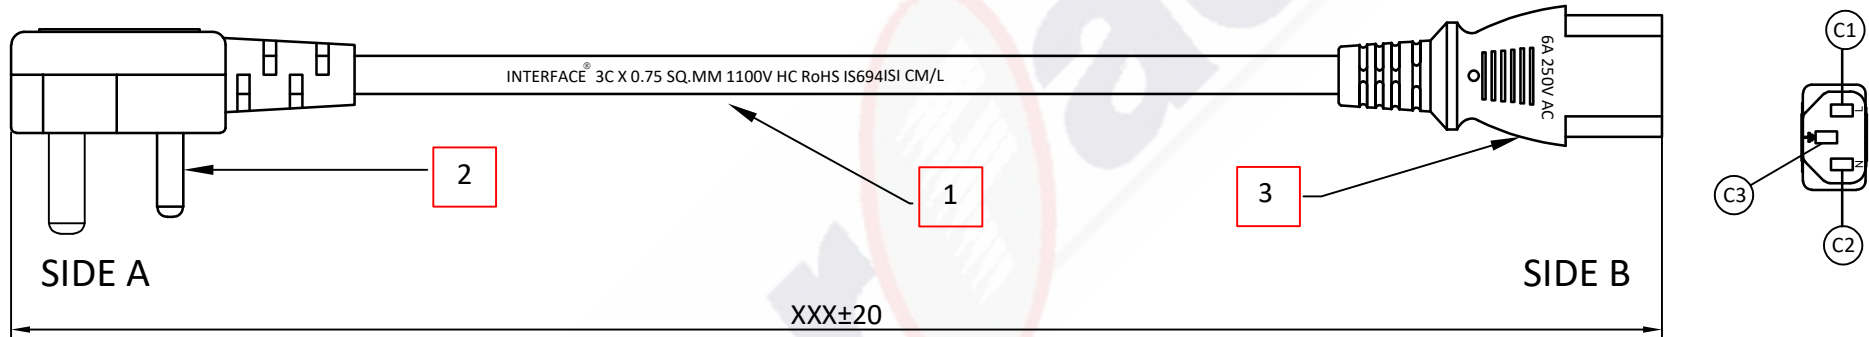

SL NO	DESCRIPTION	QTY
1	INTERFACE 3C X 0.75 SQ.MM 1100V HC RoHS IS694 CABLE	1NOS
2	3PIN PLUG, SOLID PINS,WHITE	1NOS
3	C13 CONNECTOR	1NOS
4	PLASTIC COVER FOR 3PIN PLUG, BLACK	1NOS

<p>INTERFACE CONNECTRONICS PVT LTD</p>		Description	3 PIN TO C13 POWER CABLE 6AMPS 250V 0.75 SQ.MM		
		Drg No	A4-01-9081-XXX-01		
		ICPL Part NO:	RCA-9081-XX-01		
Address: B-260,Peenya 2nd stage,Peenya industrial area, Bangalore-560058.		Customer Part No	TBA	Rev	00
Drafted by	MC	Angle of projections	Third angle	Scale	1:1
Checked	RV	Date:	9-12-2023	Sheet	1 of 1
Approved	NC	All dimensions are in mm			Size: A4
Tolerance :	<small>Unless otherwise specified for length</small> 0 - 500 - ±5 1000 - 1500 - ±15 500 - 1000 - ±10 1500 - 2000 - ±20				