


### Specification:

Current Rating: 3A  
 Insulation Resistance (Min.): 3000M Ω  
 Voltage Rating: 250V AC/DC  
 Contact Resistance (Max.): 30m Ω Operation  
 Temperature: -25 °C to +85 °C Contact  
 Material: Brass  
 Contact Plating: Gold 0.8μ over Tin  
 Housing Material: SPCC Nickel Plating  
 Harpoon Material: Copper Alloy Harpoon  
 Plating: Tin Plating  
 Screw Material: Brass over Nickel Plating  
 Insulation Material: PBT (Black) (UL94V-0)

Position	A	B	C
9 PIN	30.80	24.99	16.33
15 PIN	39.20	33.32	24.66
25 PIN	53.10	47.04	38.40
37 PIN	69.40	63.50	54.80

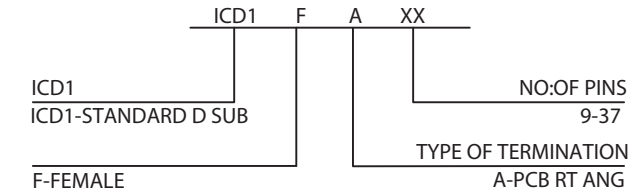

<b>Interface</b> INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	D-Sub Female PCB Right Angle Connector						
Part no.	ICD1-FAXX	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, XX ± 0.25, XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	26-07-2024