


MALE

FEMALE

| Position | A | B | C | D | E |
|----------|-------|-------|-------|-------|-------|
| 9 | 17.78 | 24.99 | 30.82 | 11.86 | 16.33 |
| 15 | 26.15 | 33.32 | 39.24 | 19.50 | 24.66 |
| 25 | 39.94 | 47.04 | 53.04 | 32.15 | 38.38 |
| 37 | 56.56 | 63.50 | 69.62 | 48.76 | 54.84 |

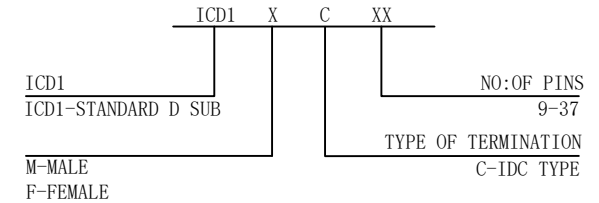

Description:

Contact Resistance: 30MΩ max at DC 100 mA
 Insulator Resistance: 1000MΩ min at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding:

Voltage: AC 500V for 1 Minute
 Operating Temperature: -55° C+105° C
 Contact: Male Brass or Female Phosphor Bronze
 Housing: PBT+30% Glass Fiber(UL94V-0)

| | | | | | |
|---|--|---------------------------------|----|------------|---------------------|
| | | INTERFACE CONNECTRONICS PVT LTD | | | |
| Address: #85, Unit#3, 1st Floor, V. V. Yoga Sauraba, S. C. Road, Yeshwanthpur , Bangalore-560022. | | | | | |
| Product Specification | DSUB IDC FLAT CABLE TYPE MALE AND FEMALE CONNECTOR | | | | |
| Part No | ICD1-XCXX | version | A0 | proportion | |
| Customercode | NA | Customer Part No: | NA | unit | mm |
| Tolerance: . X=±0.25. XX=±0.10 angle =±1.5° | | | | File No | NA |
| Drawn by | NBC | Checked by | VN | Approve by | YRS Date 26-07-2024 |