



P.B.C BOARD HOLE LAYOUT  
P.B.C LAYOUT TOLERANCE:±0.05mm



**Specification:**

- Current Rating: 3A
- Insulation Resistance (Min.): 3000M Ω
- Voltage Rating: 250V AC/DC
- Contact Resistance (Max.): 30m Ω Operation
- Temperature: -25 °C to +85 °C Contact
- Material: Brass
- Contact Plating: Gold 0.8μ over Tin
- Housing Material: SPCC Nickel Plating
- Harpoon Material: Copper Alloy Harpoon
- Plating: Tin Plating
- Screw Material: Brass over Nickel Plating
- Insulation Material: PBT (Black) (UL94V-0)

POSITION	A	B	C
9PIN	30.80	25.00	16.92
15PIN	39.20	33.32	25.25
25PIN	53.05	47.04	38.96
37PIN	69.40	63.50	55.42

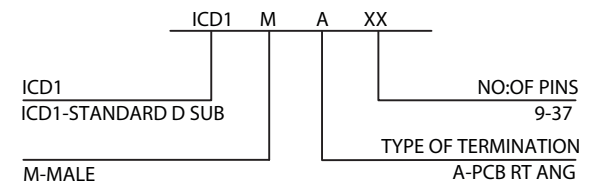

**Interface** INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Description	D-Sub Male PCB Right Angle Connector						
Part no.	ICD1-MAXX	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA		
Drawn By	SM	Checked by	RKS	Approved by	YRS	Date	26-07-2024