

Male

Male Terminal


Specification:

- 1. Electrical Characteristics
 - 1.1 Contact Resistance: 20mΩ Max.Initial.
 - 1.2 Dielectric Withstanding Voltage: 500V AC(rms) for 1 Minute.
 - 1.3 Insulation Resistance: 1000Ω Min.
- 2. Mechanical Characteristic:
 - 2.1 Durability: 300 cycles
- 3. Environment Characteristics:
 - 3.1 Operating Temperature: 0°C~+85°C.
 - 3.2 Storage Temperature: -20°C~+ 70°C.
- 4. Application Wire Awg: #20-24.

| Position | A±0.2 | B±0.2 | C±0.2 | |
|----------|-------|-------|-------|--------|
| | | | Male | Female |
| 9P | 30.80 | 24.99 | 17.90 | 16.33 |
| 15P | 39.14 | 33.32 | 26.50 | 24.66 |
| 25P | 53.04 | 47.04 | 40.00 | 38.38 |
| 37P | 69.32 | 63.50 | 56.50 | 54.84 |

Female

Female Terminal

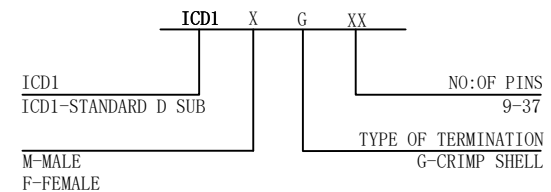

InterFace INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

| | | | | | | | |
|---------------------|--|-------------------|-----|-------------|-----|------|------------|
| Product Description | D-Sub Male Standard Crimp Type | | | | | | |
| Part no. | ICD1-MGXX | Version | A0 | Proportion | | | |
| Customer Code | TBA | Customer Part No. | TBA | Unit | mm | | |
| Tolerance | X. ±0.50, X. ± 0.38, XX ± 0.25, XXX ± 0.13 | | | File No. | TBA | | |
| Drawn By | NBC | Checked by | VN | Approved by | YRS | Date | 26-07-2024 |

