

Specification:

Insulation: P.B.T.+30%Glass Fibre (UL94V-0)

Contact: Copper alloy

Contact Plating: Selective Gold plating over

50u"Min.Nickel 100u"Min, bright Tin plating on solder tail.

Shell: SPCC-SD

Shell Plating: Cu60u"/Ni100-120u" and Cu60u"/Sn100-120u"

Contact Current Rating: 5 Amps

Insulation Resistance: 1000MΩ Min. at 500VDC


Dielectric Withstand Volt: AC 500V/Min. R.M.S.

Operating Temperature: -55°C+105°C

Soldering Temperature: 245±5°C, Soldering time 5s±2s

ROHS Compliant

NO.POS	A±0.30	B±0.13	C±0.20	D±0.10
15PIN	30.80	24.99	16.33	2.29
26PIN	39.20	33.32	24.66	2.29
44PIN	53.10	47.04	38.35	2.29
62PIN	69.40	63.50	54.80	2.41
78PIN	67.10	61.20	52.75	2.41

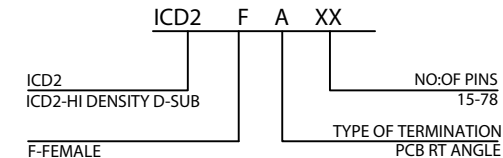

INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Description	D Sub High Density Female Right Angle PCB Solder Type						
Part no.	ICD2-FAXX	Version	A0	Proportion			
Customer Code	NA	Customer Part No.	NA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	NA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	26-07-2024