


PART #	A	B	C	D	E
ICD2-MR15	16.92	25.00	30.80	19.20	2.29
ICD2-MR26	25.25	33.30	39.20	27.70	2.29
ICD2-MR44	38.96	47.04	53.05	41.10	2.29
ICD2-MR62	55.42	63.50	69.40	57.30	2.41

**Specification:**

Insulation Resistance(MIN): 500MOHMS.  
 Current Rating(MIN): 3amp AC, 5amp DC  
 Withstanding Voltage(MIN): 500VAC  
 Contact Resistance(Max): 30 mohms  
 Contact Material: Brass,t=0.20MM  
 Insulation: PBT+30%Glass Fiber UL94v-0  
 Shell: Steel,t=0.4MM

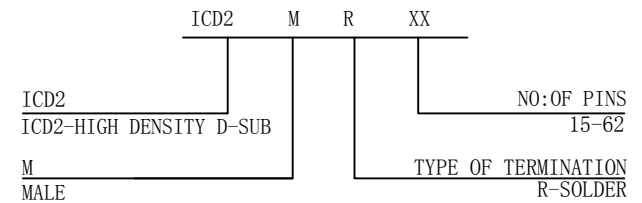

**Interface** INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Specification	D-Sub Male HD Wire Solder Type (High Density)						
Part no.	ICD2- MRXX	Version	A0	Proportion			
Customer Code	NA	Customer Part No.	NA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	NA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	26-07-2024