
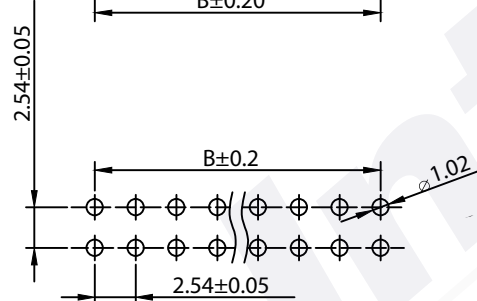
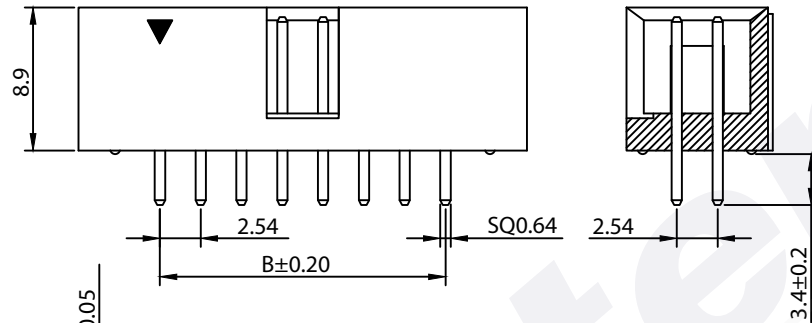


### Specification:

Current Rating: 3A  
 Insulation Resistance (Min.): 1000M  $\Omega$   
 Voltage Rating: 250V AC/DC  
 Contact Resistance (Max.): 20m  $\Omega$   
 Operation Temperature: -25 °C to +85 °C  
 Contact Material: Brass  
 Contact Plating: Nickel Plated Bottom 50 $\mu$  and Gold Plated 0.8 $\mu$   
 Insulation Material: PBT (Black) (UL94V-0)

PART NO	A	B	C
ICF2-10S	20.32	10.16	18.16
ICF2-14S	25.40	15.24	23.24
ICF2-16S	27.94	17.78	25.78
ICF2-20S	33.02	22.86	30.86
ICF2-26S	40.64	30.48	38.48
ICF2-30S	45.72	35.56	43.56
ICF2-34S	50.80	40.64	48.64
ICF2-40S	58.42	48.26	56.26
ICF2-50S	71.12	60.96	69.10
ICF2-60S	83.82	73.66	81.67
ICF2-64S	88.90	78.74	86.75

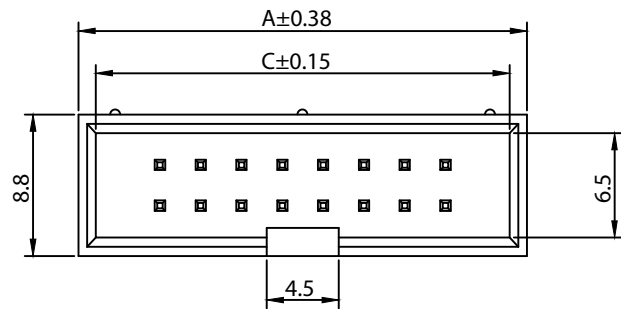

**Interface** INTERFACE CONNECTRONICS PVT LTD

Address: #85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Specification	2.54mm Box Header Straight						
Part no.	ICF2-XXS	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. $\pm 0.50$ , X. $\pm 0.38$ , .XX $\pm 0.25$ , .XXX $\pm 0.13$			File No.	TBA		
Drawn By	SM	Checked by	RKS	Approved by	YRS	Date	12/3/2019