

Specification:

Housing Material: Polycarbonate. UL Flammability Rating:
UL 94V-2, RoHS Compliant.





Contacts Type: Two prong angled pin fits solid/stranded wires.

Gold Plating: Fu'' (flash)


Shielded Material: Non-Shielded

Operating Temperature: -10°C to $+60^{\circ}\text{C}$

Housing Colour: Transparent

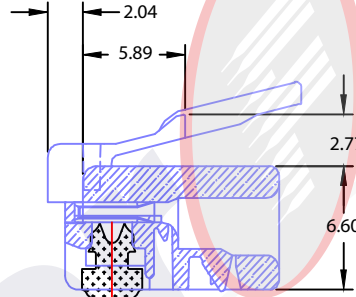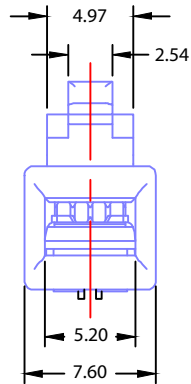

□ Two prongs pin



INTERFACE CONNECTRONICS PVT LTD							
Address: #85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	RJ11 4P2C Plug, UL E500793						
Part no.	ICMP-42-00	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ± 0.50 , X. ± 0.38 , .XX ± 0.25 , .XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	30/07/2024