


□ Two prongs pin

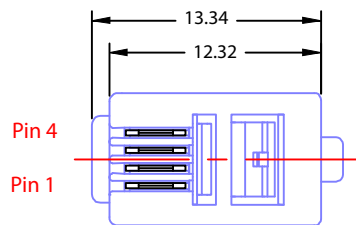

**Specification:**

Housing Material: Polycarbonate.UL Flammability Rating: UL 94V-2,RoHS Compliant.

Contacts Type: Two prong angled pin fits solid/stranded wires.

Gold Plating: Fu"(flash)

Shielded Material: Non-Shielded

Operating Temperature: -10°C to +60°C

Housing Colour: Transparent

<b>Interface</b> INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	RJ11 4P4C Plug, UL E500793						
Part no.	ICMP-44-00	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	30/07/2024