

Description:

Housing Material: Polycarbonate. UL Flammability Rating:  
UL 94V-2, RoHS Compliant.


Contacts Type: Two prong angled pin fits solid/stranded wires.

Gold Plating: 50u" ( $\geq 1.27 \mu\text{m}$ )

Shielded Material: Brass with nickel plated.

Operating Temperature:  $-10^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$

Housing Colour: Transparent

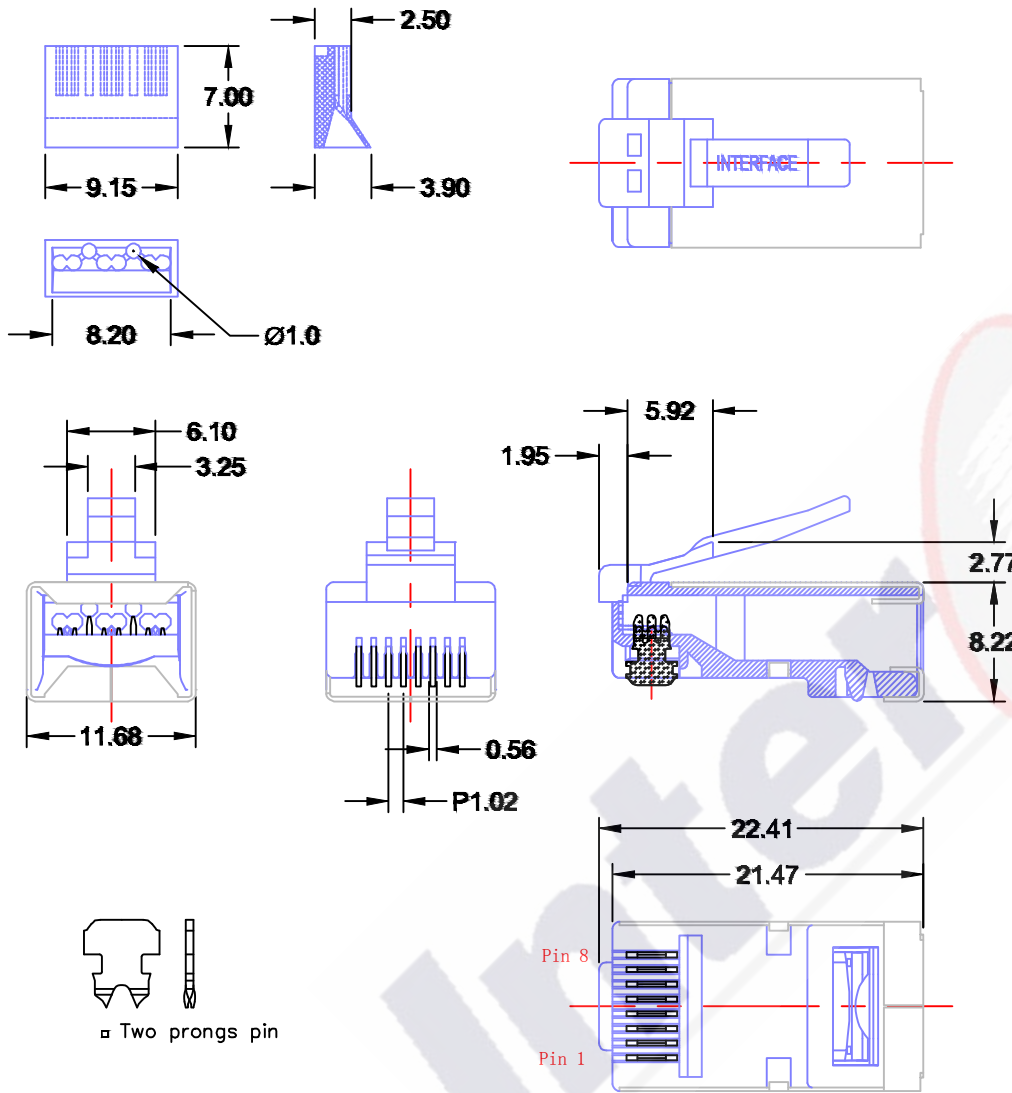

		INTERFACE CONNECTRONICS PVT LTD			
Address: #85, Unit#3, 1st Floor, V. V. Yoga Sauraba, S. C. Road, Yeshwanthpur, Bangalore-560022.					
Product Specification	8P8C SHIELDED PLUG		Part No	ICMP-88S-03E	
UL NO: E500793			Version	A0	proportion
Customercode	TBA	Customer Part No:	TBA	unit	mm
Tolerance: .X=±0.25 .XX=±0.10 °					
Drawn by	NBC	Checked by	VN	Approve by	YRS
Date		30/07/2024			