PIN CONFIGURATION		
SIDE A	COLOUR	SIDE B
PIN#1	RED	PIN#1
PIN#2	WHITE	PIN#2
PIN#3	GREEN	PIN#3
PIN#4	BLACK	PIN#5
SHELL	DRAIN	SHELL

FINISHED GOOD(CA) PART NO: DESCRIPTION

RCA-XXXX XX 01

TYPE OF CA

RCA-9123: USB 2.0 A MALE TO A FEMALE CABLE ASSEMBLY WITH 26AWG/1P+24AWG/2C CABLE

RCA-9096: USB 2.0 A MALE TO A FEMALE CABLE ASSEMBLY WITH 28AWG/1P+24AWG/2C CABLE

RCA-6005: USB 2.0 A MALE TO A FEMALE CABLE ASSEMBLY WITH 28AWG/1P+28AWG/2C CABLE

LENGTH OF CA

0.1 TO XX MTRS

COLOR OF CA

BLACK

FOR EXAMPLE;

PART NO: RCA-9096-2-01
DISC: USB 2.0 A MALE TOA FEMALE CABLE WITH 28AWG/1PR+24AWG/2C USB CABLE
LENGTH: 2MTR

CABLE CONSTRUCTION



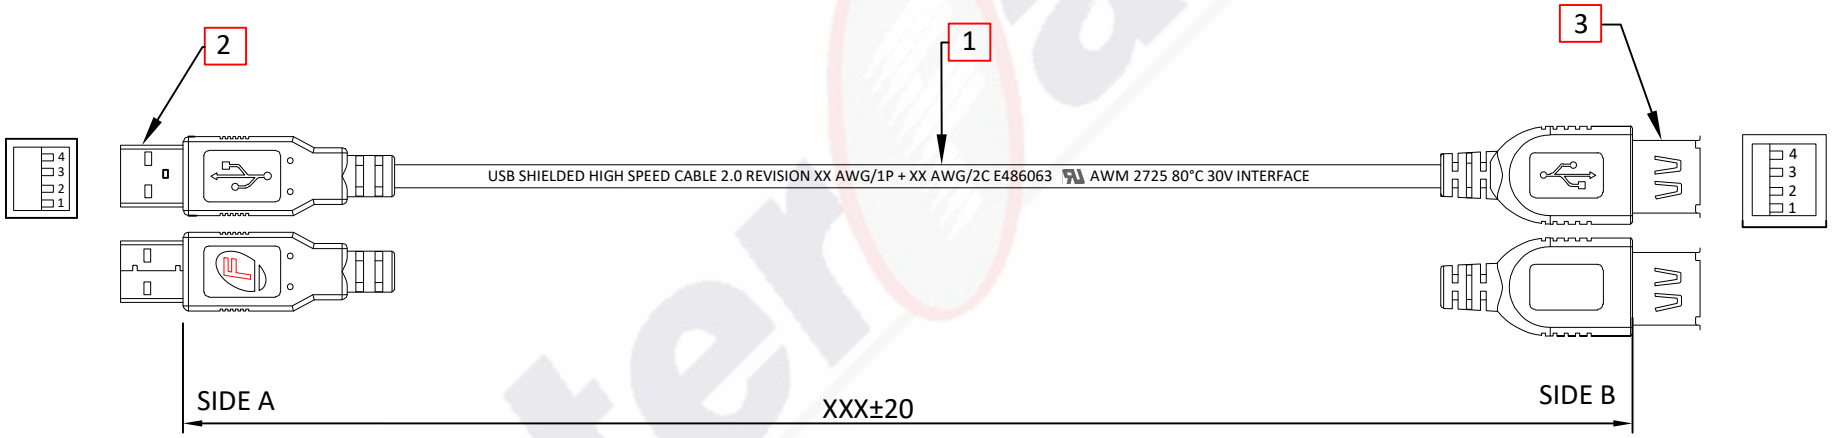

SL NO	DESCRIPTION	QTY
1	USB SHIELDED HIGH SPEED CABLE 2.0 REVISION XX AWG/1P + XX AWG/2C E486063 AWM 2725 80°C 30V INTERFACE	1NOS
2	USB A MALE, SOLDER TYPE CONNECTOR	1NOS
3	USB A FEMALE, SOLDER TYPE CONNECTOR	1NOS

Interface® Connectors to Connectivity® INTERFACE CONNECTRONICS PVT LTD		Description	USB 2.0 A MALE TO A FEMALE CABLE		
		Drg No	A4-01-XXXX-XXX-01		
		ICPL Part NO:	RCA-XXXX-XX-01		
Address: B-260,Peenya 2nd stage,Peenya industrial area, Bangalore-560058.		Customer Part No	TBA	Rev	00
Drafted by	MC	Angle of projections	Third angle	Scale	1:1
Checked	RV	Date:	23-12-2023	Sheet	1 of 1
Approved	NC	All dimensions are in mm		Size:	A4
Tolerance :	Unless otherwise specified for length 0 - 500 - ±5 1000 - 1500 - ±15 500 - 1000 - ±10 1500 - 2000 - ±20				