PIN CONFIGURATION (STRAIGHT)		
SIDE A	COLOUR	SIDE B
PIN#1	BLACK	PIN#1
PIN#2	BROWN	PIN#2
PIN#3	RED	PIN#3
PIN#4	ORANGE	PIN#4
PIN#5	YELLOW	PIN#5
PIN#6	GREEN	PIN#6
PIN#7	BLUE	PIN#7
PIN#8	GREY	PIN#8
PIN#9	WHITE	PIN#9
SHELL	DRAIN	SHELL

PIN CONFIGURATION (CROSS)		
SIDE A	COLOUR	SIDE B
PIN#1	BLACK	PIN#9
PIN#2	BROWN	PIN#8
PIN#3	RED	PIN#7
PIN#4	ORANGE	PIN#6
PIN#5	YELLOW	PIN#5
PIN#6	GREEN	PIN#4
PIN#7	BLUE	PIN#3
PIN#8	GREY	PIN#2
PIN#9	WHITE	PIN#1
SHELL	DRAIN	SHELL

FINISHED GOOD(CA) PART NO: DESCRIPTION

RCA-302X XX 01

TYPE OF CA

RCA-3023: D SUB MALE TO FEMALE CABLE ASSEMBLY WITH 9 CORE 26AWG+AEB ROHS COMPLIANT-STRAIGHT

RCA-3024: D SUB MALE TO FEMALE CABLE ASSEMBLY WITH 9CORE 26AWG+AEB ROHS COMPLIANT-CROSS

LENGTH OF CA

0.1 TO XX MTRS

COLOUR OF CA

BLACK

FOR EXAMPLE;

PART NO: RCA-3023-1-01
DESC: D SUB 9 PIN MALE TO FEMALE WITH 9 CORE SHIELDED CABLE STRAIGHT CONNECTION
LENGTH: 1MTR

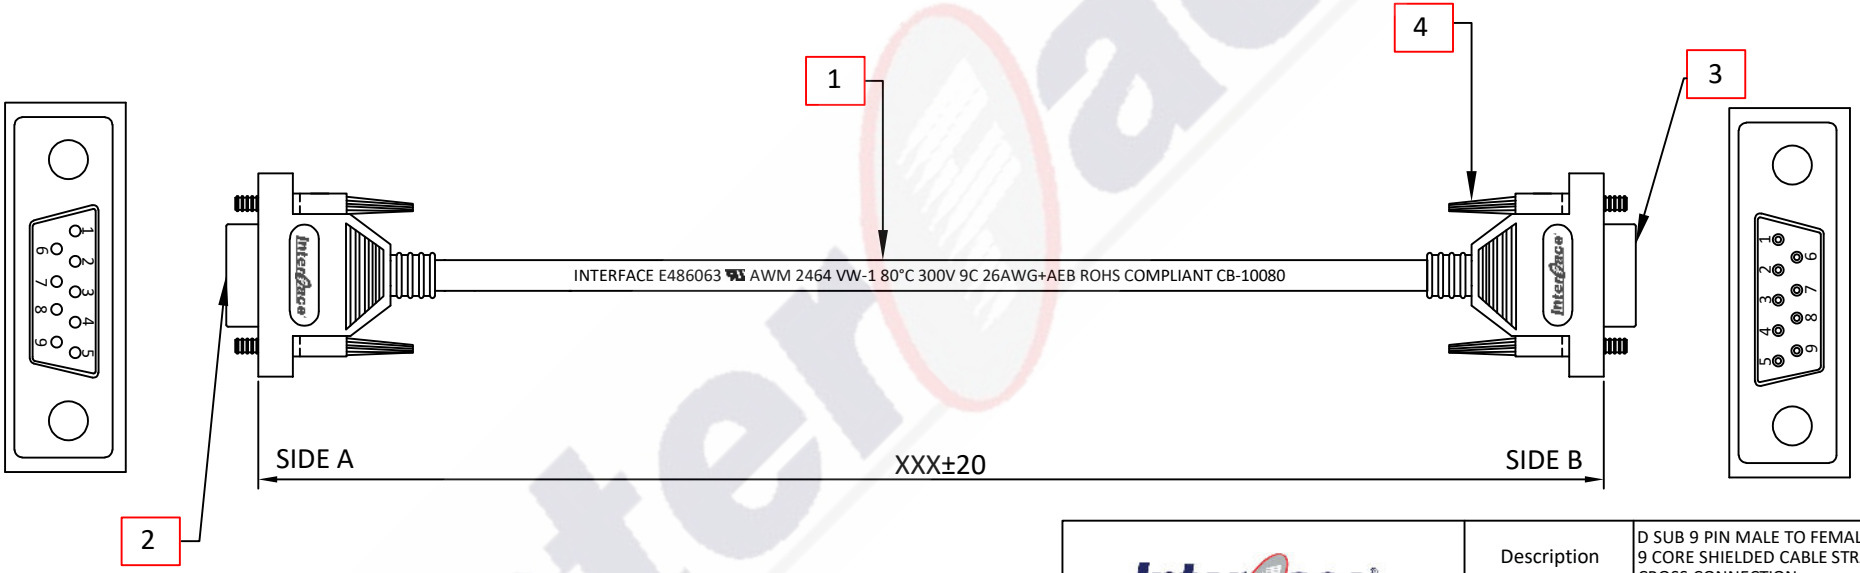

SL NO	DESCRIPTION	QTY
1	INTERFACE UL AWM 2464 9 CORE 26 AWG SHIELDED ALU FOIL DRAIN WIRE AND BRAID WIRE	1NOS
2	D-SUB-SOLDER-CONNECTOR-MALE-09PIN	1NOS
3	D-SUB-SOLDER-CONNECTOR-FEMALE-09PIN	1NOS
4	THUMB SCREW	4NOS
5	HEAT SHRINK SLEEVE 1MM	2NOS

Interface® Connectors to Connectivity®
INTERFACE CONNECTRONICS PVT LTD
Address: B-260,Peenya 2nd stage,Peenya industrial area, Bangalore-560058.

Description		D SUB 9 PIN MALE TO FEMALE WITH 9 CORE SHIELDED CABLE STRAIGHT AND CROSS CONNECTION			
Drg No		A4-01-302X-XXX-01			
ICPL Part No		RCA-302X-XX-01			
Customer Part No		TBA		Rev	00
Drafted by	MC	Angle of projections	Third angle	Scale	1:1
Checked	RV	Date	18-09-2024	Sheet	1 of 1
Approved	NC	All dimensions are in mm		Size	A4
Tolerance	Unless otherwise specified for length 0 - 500 - ±5, 500 - 1000 - ±10, 1000 - 1500 - ±15, 1500 - 2000 - ±20	"The document is an property of **Interface Connectronics Pvt Ltd** and is considered company confidential. Reproduction, unauthorised use, or disclosure of this drawing in whole or in part is prohibited."			