


PIN CONFIGURATION (STRAIGHT)		
SIDE A	COLOUR	SIDE B
PIN#1	BLACK	PIN#1
PIN#2	BROWN	PIN#2
PIN#3	RED	PIN#3
PIN#4	ORANGE	PIN#4
PIN#5	YELLOW	PIN#5
PIN#6	GREEN	PIN#6
PIN#7	BLUE	PIN#7
PIN#8	GREY	PIN#8
PIN#9	WHITE	PIN#9
DRAIN	SHELL	DRAIN

PIN CONFIGURATION (CROSS)		
SIDE A	COLOUR	SIDE B
PIN#1	BLACK	PIN#9
PIN#2	BROWN	PIN#8
PIN#3	RED	PIN#7
PIN#4	ORANGE	PIN#6
PIN#5	YELLOW	PIN#5
PIN#6	GREEN	PIN#4
PIN#7	BLUE	PIN#3
PIN#8	GREY	PIN#2
PIN#9	WHITE	PIN#1
DRAIN	SHELL	DRAIN

**FINISHED GOOD(CA) PART NO: DESCRIPTION**

RCA-300X      XX      01  
 TYPE OF CA      LENGTH OF CA      COLOUR OF CA  
 0.1 TO XX MTRS      BLACK  
 RCA-3003: D SUB MALE TO MALE CABLE ASSEMBLY WITH 9 CORE 26AWG+AEB ROHS COMPLIANT-STRAIGHT  
 RCA-3004: D SUB MALE TO MALE CABLE ASSEMBLY WITH 9CORE 26AWG +AEB ROHS COMPLIANT-CROSS  
 FOR EXAMPLE;  
 PART NO: RCA-3003-1-01  
 DESC: D SUB 9PIN MALE TO MALE WITH 9 CORE SHIELDED CABLE STRAIGHT  
 LENGTH: 1MTR

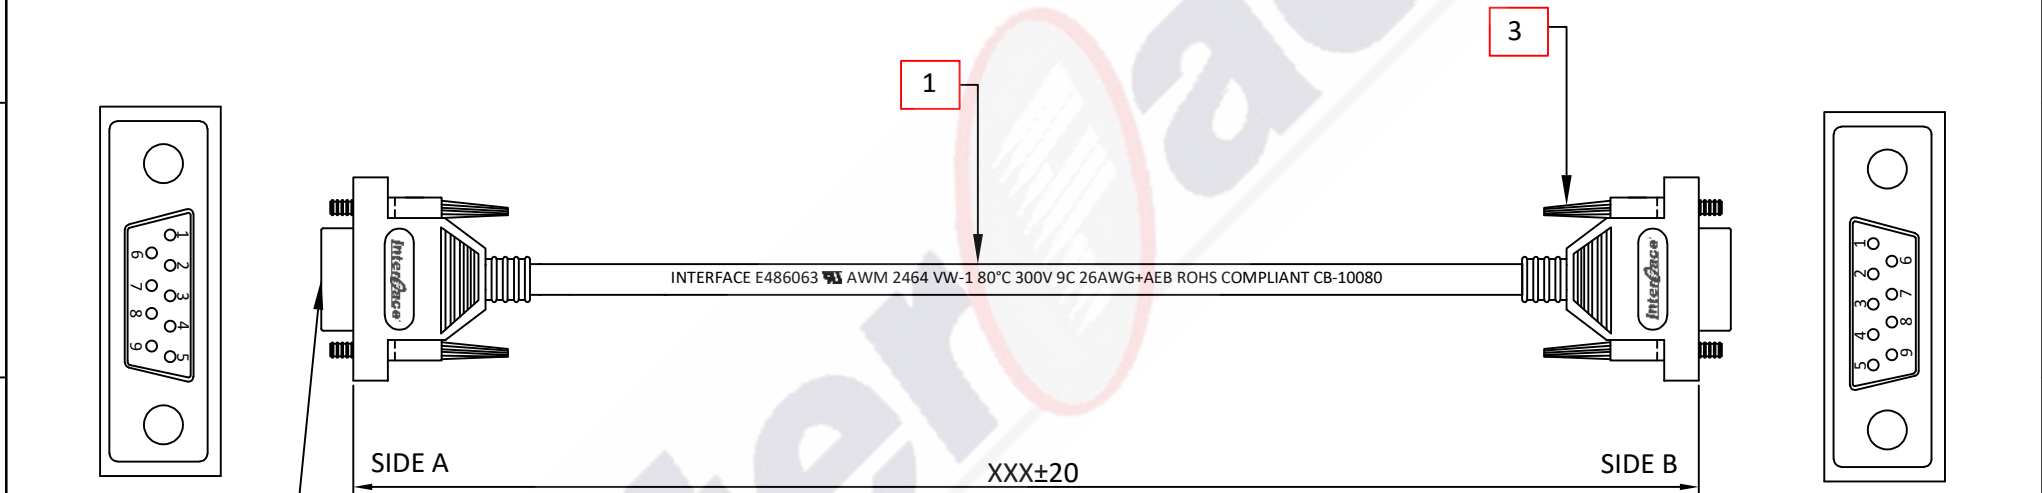

SL NO	DESCRIPTION	QTY
1	INTERFACE UL AWM 2464 9 CORE 26 AWG SHIELDED ALU FOIL DRAIN WIRE AND BRAID WIRE	1NOS
2	D-SUB-SOLDER-CONNECTOR-MALE-09PIN	2NOS
3	THUMB SCREW	4NOS
4	HEAT SHRINK SLEEVE 1MM	2NOS

<p>Connectors to Connectivity® INTERFACE CONNECTRONICS PVT LTD</p>		Description		D SUB 9 PIN MALE TO MALE WITH 9 CORE SHIELDED CABLE STRAIGHT AND CROSS CONNECTION	
		Drg No		A4-01-300X-XXX-01	
		ICPL Part No		RCA-300X-XX-01	
Address: B-260,Peenya 2nd stage,Peenya industrial area, Bangalore-560058.		Customer Part No	TBA	Rev	00
Drafted by	MC	Angle of projections	Third angle	Scale	1:1
Checked	RV	Date	26-06-2024	Sheet	1 of 1
Approved	NC	All dimensions are in mm		Size	A4
Tolerance	Unless otherwise specified for length 0 - 500 ±5      1000 - 1500 ±15 500 - 1000 ±10      1500 - 2000 ±20	*The document is an property of Interace Connectronics Pvt Ltd and is considered company confidential. Reproduction, unauthorised use, or disclosure of this drawing in whole or in part is prohibited.*			