

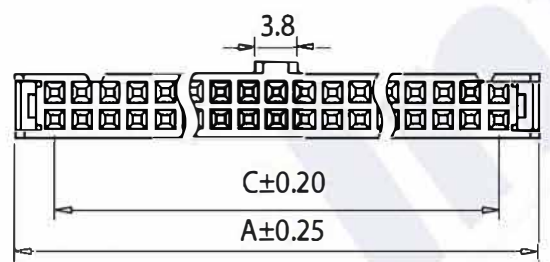

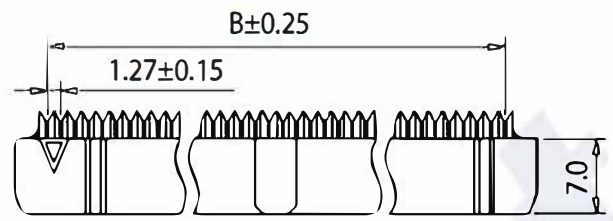

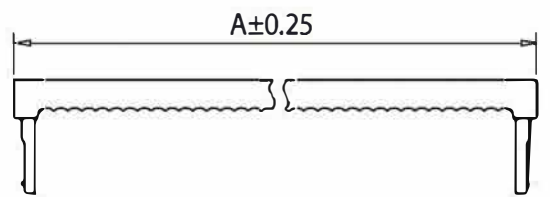



1 2 3 4 5 6 7 8 9

A
B
C
D
E
F

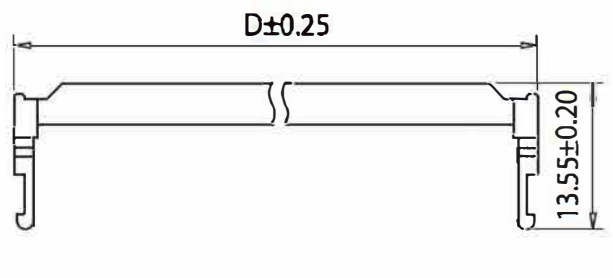

Specification:

Current Rating: 3A
Insulation Resistance (Min.): 1000M Ω Voltage Rating: 250V AC/DC
Contact Resistance (Max.): 20m Ω
Operation Temperature: -25 $^{\circ}\text{C}$ to +85 $^{\circ}\text{C}$
Contact Material: Brass
Selective Plating: Gold Flash on Contact area
Insulation Material: PBT (Black) (UL94V-0)

POS.	Dim. A	Dim. B	Dim. C	Dim. D
6	12.89	6.35	5.08	12.69
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
18	27.56	21.59	20.32	27.36
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.80
34	47.88	41.91	40.64	47.68
36	50.42	44.45	43.18	50.22
40	55.50	49.53	48.26	55.30
44	60.58	54.61	53.34	60.38
50	68.20	62.23	60.96	68.40
60	80.90	74.93	73.66	80.70
64	85.98	80.01	78.74	85.78

Interface INTERFACE CONNECTRONICS PVT LTD

Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.

Product Description	2.54mm IDC Connector with Strain Relief				
Part no.	ICF1-XX	Version	A0	Proportion	
Customer Code	TBA	Customer Part No.	TBA	Unit	mm
Tolerance	X. ± 0.50 , X. ± 0.38 , .XX ± 0.25 , .XXX ± 0.13			File No.	TBA
Drawn By	SM	Checked by	RKS	Approved by	YRS
				Date	12/3/2022