





### Specification:

Current Rating: 1A AC/DC  
 Insulation Resistance (Min.): 1000MΩ  
 Voltage Rating: 30V AC/DC  
 Withstanding Voltage (Min): 500V AC  
 Contact Resistance (Max.): 30mΩ  
 Operation Temperature: -40 °C to +105 °C  
 Contact Material: Phospher Bronze  
 Contact Plating: Selective Gold Plating  
 Insulation Material: PBT (Black) (UL94V-0)

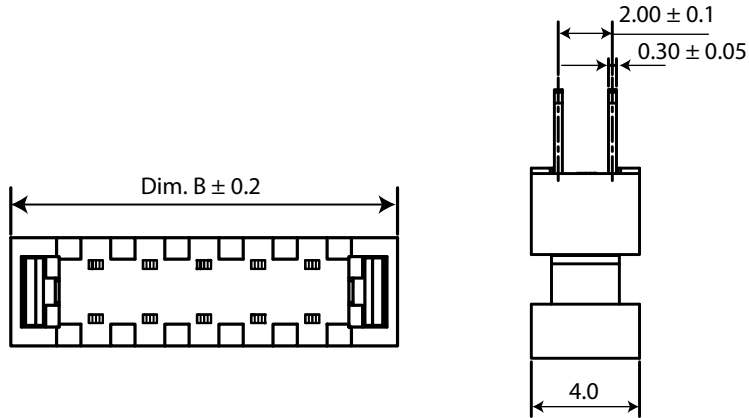


Position	A	B
10	8.00	14.20
12	10.00	16.20
14	12.00	18.20
16	14.00	20.20
20	18.00	24.20
24	22.00	28.20
26	24.00	30.20
28	26.00	32.20
30	28.00	34.20

Position	A	B
34	32.00	38.20
40	38.00	44.20
44	42.00	48.20
50	48.00	54.20

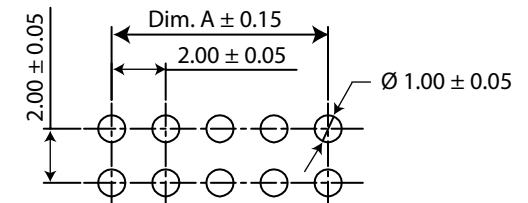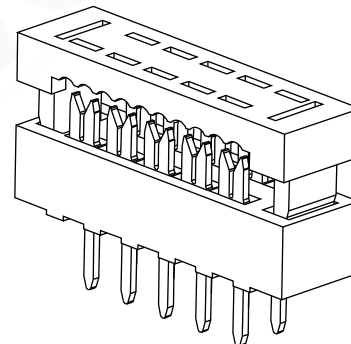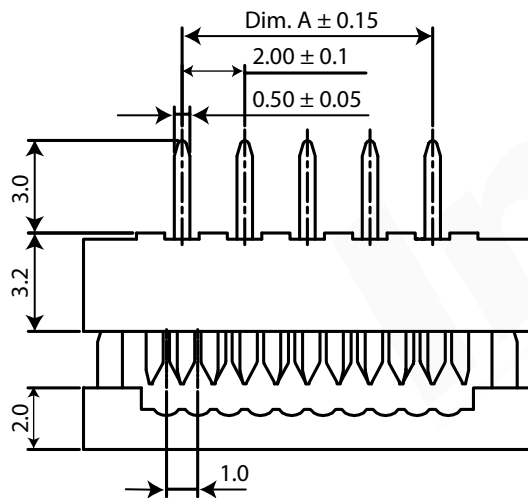

PCB LAYOUT

<b>Interface</b> INTERFACE CONNECTRONICS PVT LTD							
Address:#85, Unit#3, 1st Floor, V.V. Yoga Saurabha, S. C. Road, Yeshwanthpur, Bangalore- 560 022.							
Product Description	Interface® 2mm Transition Type Straight						
Part no.	ICF11-010	Version	A0	Proportion			
Customer Code	TBA	Customer Part No.	TBA	Unit	mm		
Tolerance	X. ±0.50, X. ± 0.38, .XX ± 0.25, .XXX ± 0.13			File No.	TBA		
Drawn By	NBC	Checked by	VN	Approved by	YRS	Date	02/05/2023